


BJ153-A

溝付きストラップセット(Aタイプ)

標準 在庫品 R&S

IMAO

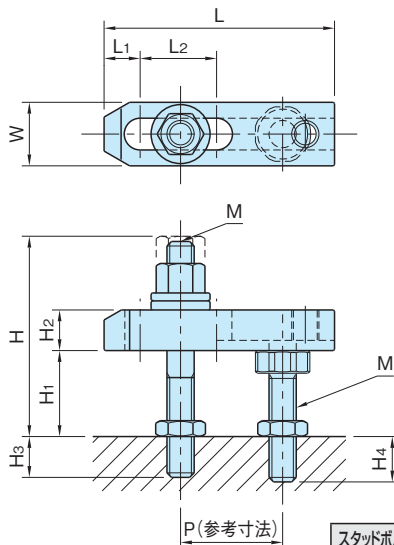

スタッドボルト	その他
SCM435 焼入焼戻 四三酸化鉄皮膜	S45C 焼入焼戻 四三酸化鉄皮膜

品番	H ₁	L	W	H _{max}	M	L ₂	H ₃	H ₄	P	L ₁	H ₂	クランプ力(kN) 突出量 max.~min.	許容締付トルク (N・m)	質量 (kg)
BJ153-08040A1	15~25	40		51	M 8×1.25	6	12	22~12		10		5.9~ 7.1	17	0.12
BJ153-08040A2	20~35			66		14	14	27~12						0.14
BJ153-08050A1	15~25	50	19	51		12	12	22~12			12	4.6~ 6.6		0.13
BJ153-08050A2	20~35			66		14	14	27~12	20					0.15
BJ153-08063A1	15~25	63		51		12	12	22~12		12		3.6~ 6.6		0.14
BJ153-08063A2	20~35			66		14	14	27~12						0.16
BJ153-10050A1	20~30	50		62	M10×1.5	8	18	20~10		12		9.4~11.5	34	0.21
BJ153-10050A2	25~45			80		20	20	30~10			12			0.23
BJ153-10063A1	20~30	63		62		18	18	20~10	25			7.3~10.6		0.23
BJ153-10063A2	25~45			80		20	20	30~10						0.25
BJ153-10080A1	20~30	80	25	63		32	18	20~10	30			8.8~15	45	0.3
BJ153-10080A2	25~45			80		20	20	30~10		15				0.32
BJ153-10100A1	20~30	100		63		40	18	20~10	40			9.5~16.4		0.35
BJ153-10100A2	25~45			80		20	20	30~10			16			0.37
BJ153-10125A1	20~30	125		63		50	18	20~10	55			10.3~17.7		0.41
BJ153-10125A2	25~45			80		20	20	30~10						0.43

品番	H ₁	L	W	H max.	M	L ₂	H ₃	H ₄	P	L ₁	H ₂	クランプ力(kN) 突出量 max.~min.	許容締付トルク (N・m)	質量 (kg)		
BJ153-12063A1	20~40	63		80	M12×1.75	14	20	33~13	30	14	16	15.3~20.2	71	0.38		
BJ153-12063A2	45~55			101			24	23~13				0.42				
BJ153-12080A1	20~40	80		80		25	20	33~13	11.8~17.8	0.43						
BJ153-12080A2	45~55			101			24	23~13		0.47						
BJ153-12100A1	20~40	100	32	80		M16×2	40	20	33~13	35	20	19	12.3~21.2	80	0.54	
BJ153-12100A2	40~55			101				24	28~13				0.58			
BJ153-12125A1	20~40	125	80	50			20	33~13	50	13.9~23.8			0.63			
BJ153-12125A2	40~55		101				24	28~13		0.67						
BJ153-12160A1	20~40	160	80	60	20		33~13	75	16.1~26.3	0.76						
BJ153-12160A2	40~55		101		24		28~13		0.8							
BJ153-16080A1	25~35	80	38	81	M16×2		17	20	28~18	40	18	19	14.7~24.8		115	0.72
BJ153-16080A2	35~50			96				30	33~18				0.77			
BJ153-16100A1	25~35	100		87		30	20	28~18		25	25	15.4~24.8	129	0.94		
BJ153-16100A2	35~50			102			24	33~18				0.99				
BJ153-16125A1	25~35	125		87		45	20	28~18	50			16.1~26.9		1.07		
BJ153-16125A2	35~50			102			24	33~18						1.12		
BJ153-16160A1	25~35	160		87		65	20	28~18	65			16.9~29.1		1.25		
BJ153-16160A2	35~50			102			24	33~18						1.3		
BJ153-20160A1	45~70	160	50	130	M20×2.5	60	36	45~20	60	32	25	18.1~29.8		183	2	
BJ153-20200A1		200				80			80			19.1~32.7			2.3	

使用例・使用方法

