
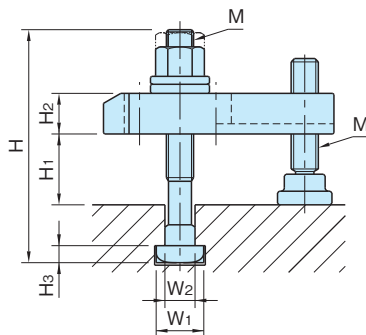
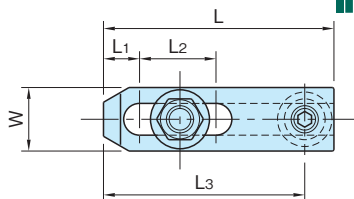


BJ153-B-T

溝付きストラップセット(T溝タイプ)

標準 在庫品 

IMAO



Tスロットボルト	その他
スチール 四三酸化鉄皮膜	S45C 焼入焼戻 四三酸化鉄皮膜

品番	H ₁	L	W	H	W ₂	W ₁	M	L ₂	L ₁	L ₃	H ₂	H ₃	クランプ力(kN) 突出量max.~min.	許容締付トルク (N・m)	質量 (kg)
BJ153-12063B1-T	15~45	63		108				14	14	52	16		13.7~21.6	71	0.41
BJ153-12063B2-T	15~70			133											0.44
BJ153-12063B3-T	20~105			168											0.5
BJ153-12080B1-T	15~45	80		108				25		69			10.3~21		0.46
BJ153-12080B2-T	15~70			133											0.49
BJ153-12080B3-T	20~105			168											0.55
BJ153-12100B1-T	15~40	100	32	108	13.7	22	M12×1.75	40		89		8	10.9~25.8		0.57
BJ153-12100B2-T	15~65			133											0.6
BJ153-12100B3-T	20~100			168											0.66
BJ153-12125B1-T	15~40	125		108					20				12.9~27.5	80	0.66
BJ153-12125B2-T	15~65			133											0.69
BJ153-12125B3-T	20~100			168											0.75
BJ153-12160B1-T	15~40	160		108						149			15.4~28.8		0.79
BJ153-12160B2-T	15~65			133											0.82
BJ153-12160B3-T	20~100			168											0.88

品 番	H ₁	L	W	H	W ₂	W ₁	M	L ₂	L ₁	L ₃	H ₂	H ₃	クランプ力 (kN) 突出量max.~min.	許容締付トルク (N・m)	質量 (kg)
BJ153-16080B1-T	20~ 55	80		135	17.7	28	M16×2	17	18	65	19		16.6~26	115	0.81
BJ153-16080B2-T	20~ 85			170											0.87
BJ153-16080B3-T	50~130			210											1
BJ153-16100B1-T	20~ 50	100		135	17.7	28	M16×2	30		85		10	14.2~28.4	129	1.03
BJ153-16100B2-T	20~ 85			170											1.09
BJ153-16100B3-T	50~125			210											1.21
BJ153-16125B1-T	20~ 50	125	38	135	17.7	28	M16×2	45	25	110	25		14.7~31.1	129	1.16
BJ153-16125B2-T	20~ 85			170											1.22
BJ153-16125B3-T	50~125			210											1.34
BJ153-16160B1-T	20~ 50	160		135	17.7	28	M16×2	65		145			15.3~33.4	129	1.34
BJ153-16160B2-T	20~ 85			170											1.4
BJ153-16160B3-T	50~125			210											1.52

使用例・使用方法

