


BJ156-B

スロットストラップセット(Bタイプ)

標準在庫品 R&S

IMAO

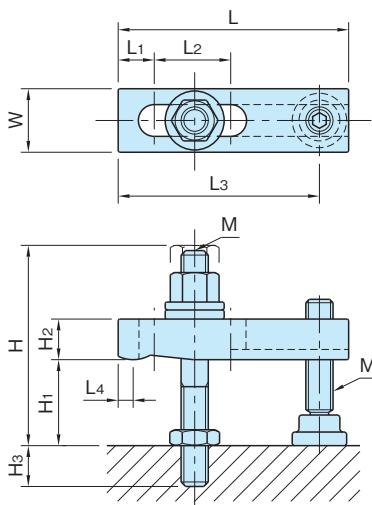

スタッドボルト	その他
SCM435 焼入焼戻 四三酸化鉄皮膜	S45C 焼入焼戻 四三酸化鉄皮膜

品番	H ₁	L	W	H _{max.}	M	H ₃	L ₂	L ₁	L ₃	L ₄	H ₂	クランプ力(kN) 突出量 max~min.	許容締付トルク (N・m)	質量 (kg)
BJ156-08050B1	20~35	50	19	64	M 8x1.25	16	14	42	12	5	12	4 ~ 7.6	17	0.14
BJ156-08050B2	35~55			81		20								0.15
BJ156-08050B3	60~75			105		16								0.17
BJ156-08063B1	20~35	63	19	64	M 8x1.25	16	27	55	12	5	12	3.1~ 8.3	17	0.15
BJ156-08063B2	35~55			81		20								0.16
BJ156-08063B3	60~75			105		16								0.18
BJ156-08080B1	15~35	80	25	65	M10x1.5	16	34	15	72	16	16	3.4~ 8.4	45	0.2
BJ156-08080B2	30~50			80		20								0.21
BJ156-08080B3	55~75			105		16								0.23
BJ156-10063B1	25~50	63	25	80	M10x1.5	18	32	15	70	5	12	6.4~12.2	34	0.25
BJ156-10063B2	50~80			109		20								0.28
BJ156-10080B1	25~50			83		20								0.3
BJ156-10080B2	50~75	80	25	108	M10x1.5	20	32	15	70	5	16	7.4~17.7	45	0.34
BJ156-10100B1	20~45			81		40								0.41
BJ156-10100B2	45~75			111		40								0.45

品番	H ₁	L	W	H max.	M	H ₃	L ₂	L ₁	L ₃	L ₄	H ₂	クランプ力(kN) 突出量 max~min.	許容締付トルク (N・m)	質量 (kg)			
BJ156-12063B1	25~ 50	63		86	M12×1.75	18	14	14	52		16	13.7~21.6	71	0.39			
BJ156-12063B2	50~ 70			107		0.43											
BJ156-12063B3	80~105			141		24								0.49			
BJ156-12080B1	25~ 50	80		86		18	25	69	10.3~21		0.43						
BJ156-12080B2	50~ 70			107							0.47						
BJ156-12080B3	80~105			141							24	0.53					
BJ156-12100B1	20~ 45	100	32	84	M12×1.75	18	40	89	6	19	10.9~25.8	80	0.57				
BJ156-12100B2	45~ 70			109		24							0.63				
BJ156-12100B3	75~100			139		18							20	114	0.64		
BJ156-12125B1	20~ 45	125		84			12.9~27.5	0.68									
BJ156-12125B2	45~ 70			109				0.74									
BJ156-12125B3	75~100			139		24		0.96									
BJ156-12160B1	15~ 40	160		85	M16×2	18	60	149		25	17.4~32.5	90	1				
BJ156-12160B2	40~ 65			110		24							149	25	17.4~32.5	90	1.06
BJ156-12160B3	70~ 95			140													1.18
BJ156-16080B1	40~ 60	80		106		M16×2	24	17		18	6	19					16.6~26
BJ156-16080B2	65~ 90			136			32						1.47				
BJ156-16080B3	95~130			176			24						30	85	12.7~25.3	1.35	
BJ156-16100B1	35~ 60	109	32	110	14.7~31.1			1.5									
BJ156-16100B2	60~ 90	100						139	25	129		1.64					
BJ156-16100B3	95~125							174				45	25	14.7~31.1	1.52		
BJ156-16125B1	35~ 55		125	38	107	65		145			1.67						
BJ156-16125B2	60~ 90	142			32		1.81										
BJ156-16125B3	90~125	177			24		65				145	15.3~33.4	1.71				
BJ156-16160B1	35~ 55	160		107		1.86											
BJ156-16160B2	60~ 90			142	32												
BJ156-16160B3	90~125			177													

使用例・使用方法

