


# BJ158

# ねじ穴付きストラップ

標準 在庫品 


IMAO

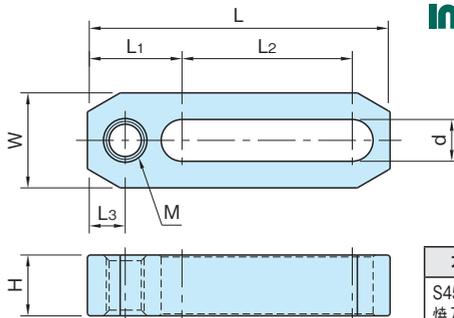

本体  
S45C  
焼入焼戻  
四酸化鉄皮膜

品番	L	W	H	d	L <sub>2</sub>	M	L <sub>1</sub>	L <sub>3</sub>	クランプ力(kN) 突出量 max.~min.	許容締付トルク (N·m)	質量 (g)
BJ158-08063	63	19	12	9	36	M 8×1.25	19	7	3.2~ 8	17	65
BJ158-08080	80				53				3.5~ 8.6		80
BJ158-10080	80	25	16	11	45	M10×1.5	25	10	6.8~16.9	45	160
BJ158-10100	100				65				7.3~18.3		190
BJ158-10125	125				90				7.7~19.3		235
BJ158-12100	100	32	19	13	60	M12×1.75	28	10	10.2~25.6	80	300
BJ158-12125	125				85				11 ~27.5		370
BJ158-12160	160				120				11.6~29		470
BJ158-16125	125	38	25	17	73	M16×2	36	12	12.1~30.3	129	580
BJ158-16160	160				108				13.2~33		720
BJ158-16200	200				148				13.9~34.7		890
BJ158-20160	160	50	25	21	90	M20×2.5	45	15	15 ~36	183	1020
BJ158-20200	200		130		16 ~37				1600		
BJ158-20250	250		180		17 ~38				1960		

## 使用例・使用方法

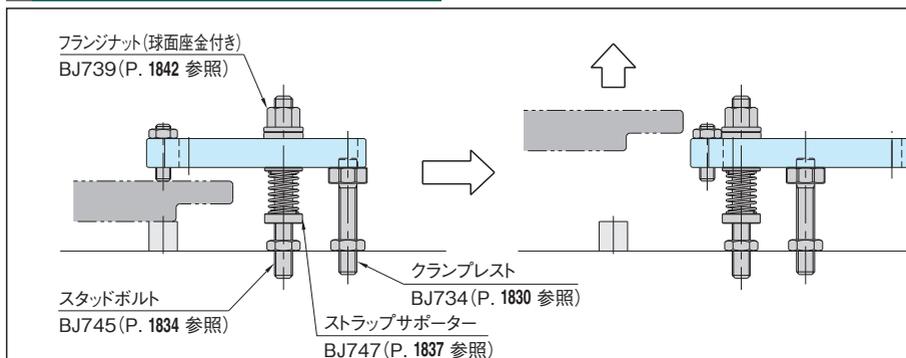

## 特長

最大限の長穴が設けてありますので、高い汎用性があります。