

PEC-T


パイプ用エンドキャップ

標準 在庫品



材質の特性
P.22a31

Original ELESA Model NIL

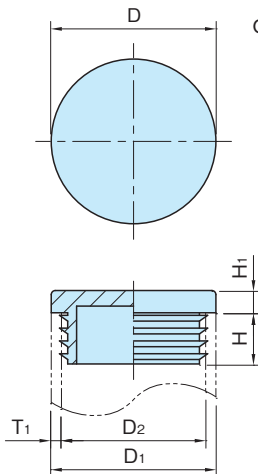

本体
ポリエチレン
ブラック
グレー

1袋品番		D	D ₁	T ₁ 最小~最大	D ₂ 最大~最小	H ₁	H	1袋価格	1袋入数 (個)
ブラック	グレー								
PEC-T10-BK	PEC-T10-GR	10	10	1~2	8~6	3.5	11	560	50
PEC-T12-BK	PEC-T12-GR	12	12		10~8	4		560	50
PEC-T13-BK	PEC-T13-GR	13	13		11~9	5	560	25	
PEC-T14-BK	PEC-T14-GR	14	14		12~10	3	560	25	
PEC-T15-BK	PEC-T15-GR	15	15		13~11	11	560	25	
PEC-T16-BK	PEC-T16-GR	16	16		14~12		560	25	
PEC-T18-BK	PEC-T18-GR	18	18		16~14	11.5	560	25	
PEC-T19-BK	PEC-T19-GR	19	19		17~14		560	25	
PEC-T20-BK	PEC-T20-GR	20	20		18~15		670	20	
PEC-T22-BK	PEC-T22-GR	22	22		1~2		670	20	
PEC-T23-BK	PEC-T23-GR	23	23	1~2.5	670		20		
PEC-T24-BK	PEC-T24-GR	24	24	1~2.5	22~19		11.5	890	20
PEC-T25-BK	PEC-T25-GR	25	25	23~19	890			20	
PEC-T26-BK	PEC-T26-GR	26	26	1~3	24~20		5	670	15
PEC-T27-BK	PEC-T27-GR	27	27		25~21			670	15
PEC-T28-BK	PEC-T28-GR	28	28		26~22			670	15
PEC-T30-BK	PEC-T30-GR	30	30	1~2.5	28~25	12		670	15
PEC-T32-BK	PEC-T32-GR	32	32	1~3	30~26			11.5	1,000
PEC-T34-BK	PEC-T34-GR	34	34		32~28	1,000			15
PEC-T35-BK	PEC-T35-GR	35	35		33~29	1,000			15
PEC-T36-BK	PEC-T36-GR	36	36		34~30	1,000			15
PEC-T37-BK	PEC-T37-GR	37	37		35~31	1,000			15
PEC-T38-BK	PEC-T38-GR	38	38		1~3.5	36~31			1,000
PEC-T40-BK	PEC-T40-GR	40	40	1~3	38~34	11.5	670	10	
PEC-T42-BK	PEC-T42-GR	42	42		40~36		890	10	
PEC-T45-BK	PEC-T45-GR	45	45		43~39		670	5	

1袋品番		D	D ₁	T ₁ 最小～最大	D ₂ 最大～最小	H ₁	H	1袋価格	1袋入数 (個)
ブラック	グレー								
PEC-T 46 -BK	PEC-T 46 -GR	46	46	1.5～3.5	43 ～39	5	11.5	670	5
PEC-T 48 -BK	PEC-T 48 -GR	48	48	1.2～3.6	45.6～40.8		11.5	830	5
PEC-T 50 -BK	PEC-T 50 -GR	50	50	1 ～2.5	48 ～45		14.5	830	5
PEC-T 50A-BK	PEC-T 50A-GR			2.5～4.5	45 ～41		11.5	830	5
PEC-T 52 -BK	PEC-T 52 -GR	52	52	1.5～3.5	49 ～45		14.5	830	5
PEC-T 55 -BK	PEC-T 55 -GR	55	55	1 ～3	53 ～49			1,110	5
PEC-T 55A-BK	PEC-T 55A-GR			3 ～5	49 ～45			1,110	5
PEC-T 60 -BK	PEC-T 60 -GR	60	60	1.5～3	57 ～54			1,110	5
PEC-T 60A-BK	PEC-T 60A-GR			3 ～5	54 ～50		17.5	1,110	5
PEC-T 65 -BK	PEC-T 65 -GR	65	65	1.5～3.5	62 ～58		14.5	560	2
PEC-T 70 -BK	PEC-T 70 -GR	70	70		67 ～63	21	560	2	
PEC-T 75 -BK	PEC-T 75 -GR	75	75	1 ～3.5	73 ～68	6	21.5	670	2
PEC-T 76 -BK	PEC-T 76 -GR	76	76	1.6～4	72.8～68		670	2	
PEC-T 80 -BK	PEC-T 80 -GR	80	80	1.5～3	77 ～74	5	22	670	2
PEC-T 85 -BK	PEC-T 85 -GR	85	85	1.5～4	82 ～77	6	21	1,110	2
PEC-T 88 -BK	PEC-T 88 -GR	88	88		85 ～80		21.5	1,110	2
PEC-T 90 -BK	PEC-T 90 -GR	90	90	1.5～5	87 ～80		21	1,110	2
PEC-T 95 -BK	PEC-T 95 -GR	95	95	1.5～4	92 ～87			1,330	2
PEC-T100 -BK	PEC-T100 -GR	100	100	2 ～4.5	96 ～91		28.5	1,330	2

技術データ

使用温度 max.80℃ min.0℃

注意事項

袋単位での販売となります。単品(1袋未満)での販売はしていません。

ご注文例

(50個ご注文いただく場合)

1袋品番	ご注文数(袋)
PEC-T10-BK	1
PEC-T40-GR	5
PEC-T80-BK	25