

ST-H213～245 横型トグルクランプ


標準 在庫品 **R** **S** **SUS**

STEEL-SMITH®
Clamps on the go... that never let go!

NEW品番
赤文字表記



タイプ	本体	グリップ	ボルト、ナット	パッド
ST-H 213U～227U	SPCC亜鉛メッキ	ポリ塩化ビニル	SUM41 亜鉛メッキ	クロロプレンゴム (CR)
ST-H 237U、245U	SPHD亜鉛メッキ		SUS304 電解研磨	
ST-H 213U-S、227U-S	SUS304L 電解研磨		SUS304 電解研磨	

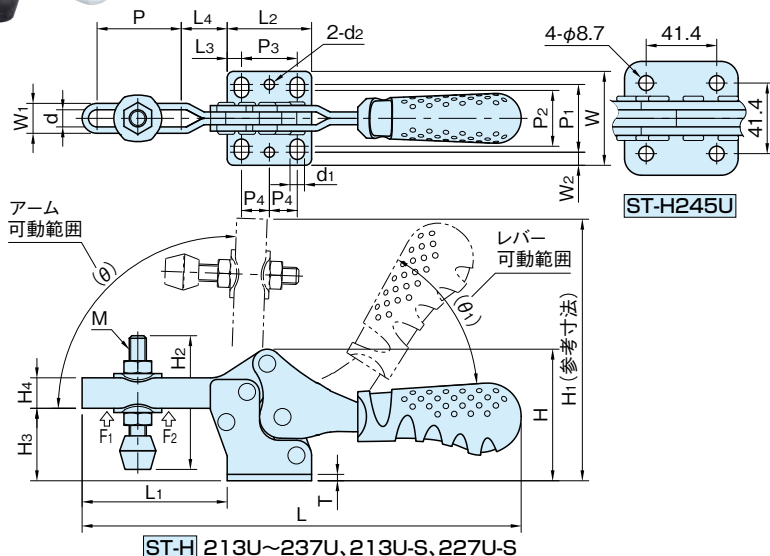

品番	θ	θ ₁	M	H ₂	H ₃	d	P	L	H	W	L ₁	L ₂	T	d ₁	d ₂
ST-H213U	90°	60°	M 5	33	19.5	6	22	112	36	28	39.5	25.5	2	4.3	—
ST-H213U-S		65°	M 6	55	27	7.2	42	174	52	41.1	63	37.6	3	5.5	4.7
ST-H217U	92°	60°	M 8	66	34	8.8	38.5	210	62	44	72	39.6		6.8	
ST-H227U		60°	M10	86	44	11	78	282	80	58	106.5	57.2	4	8.5	5.7
ST-H237U	100°	70°	M12	116	58	13	80	329	109	68.6	128	66.8	5	—	—
ST-H245U		70°	M12	116	58	13	80	329	109	68.6	128	66.8	5	—	—

品番	P ₁	P ₂	P ₃	P ₄	W ₂	L ₃	L ₄	H ₁	H ₄	W ₁	締圧力		質量 (g)
											F ₁ (kN)	F ₂ (kN)	
ST-H213U	19	17.6	13.5	—	4.5	6	13	72	9.5	10	0.3	0.7	70
ST-H213U-S	19	17.6	13.5	—	4.5	6	13	72	9.5	10	0.3	0.7	70
ST-H217U	29.5	23.7	26.2	13.1	5.8	5.7	14	111	12.5	13.2	0.36	1	230
ST-H227U	31.6	26.6			6.2	6.7	26.5	124	14.3	14.8	1	2.2	320
ST-H237U	43	39	41.4	20.7	7.5	7.9	19	183	19	19	1.3	3.4	760
ST-H245U	—	—	—	—	13.6	12.7	37	219	25.4	23	1.8	4.4	1420