

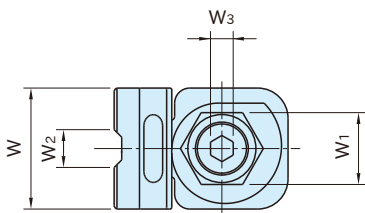


BJ162

凸轮侧面固定夹具

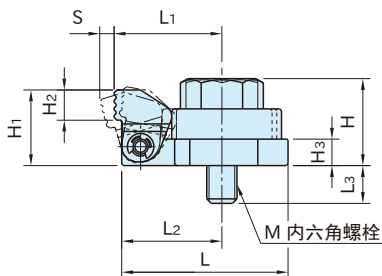

本体、夹口	凸轮
SCM440 淬火回火 四氧化三铁膜	SCM435 淬火回火 四氧化三铁膜



型 号	H ₁	S	W	W ₂	H ₂	L ₁	L	L ₂	H ₃	M	L ₃	H	W ₁
BJ162-08001	20	4	32	10	8	28.5	44	26.5	7	M 8×1.25-30L	15	23	19
BJ162-10001	25	5	40	12	10	35	54	33	9	M10×1.5-35L	16	29	24
BJ162-12001	30	5.5	46	14	12	39.5	62	37.5	11	M12×1.75-40L	17	35	27

型 号	W ₃	夹紧力 (kN)	容许紧固扭矩 (N·m)	质量 (g)
BJ162-08001	6	3.5	45	160
BJ162-10001	8	5.5	55	310
BJ162-12001	10	7	70	490

使用示例及使用方法

用内六角螺栓固定凸轮和带凸缘轴环后，再用扳手等夹紧。

相关产品页



另有手柄紧固类型的产品。

QLSC 凸轮侧推式快捷夹具

