

BJ201

可调式尖型侧面限位器






(齿面)





(平面)

本体	夹口
SCM440 四氧化三铁膜	SCM440 淬火回火 四氧化三铁膜 精密研磨(基准面用)

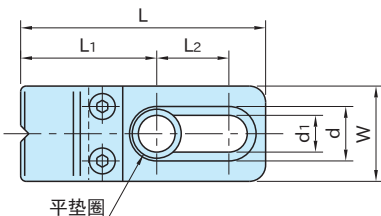


(齿面)



(平面)

类型	型 号	W	H ₁	H ₃	L ₁	L ₂	L	d ₁	d	H ₂	H
齿面	BJ201-08016	25	7.5	1.5	33.5	16.5	60	8.5	14	8.5	16
	BJ201-12022	35	10	2	50	26.5	90	13	20	10.5	22
	BJ201-16030	40	14		67.5	30	115	17	26	14.5	30
平面	BJ201-08116	25	7.5	1.5	33.5	16.5	60	8.5	14	8.5	16
	BJ201-12122	35	10	2	50	26.5	90	13	20	10.5	22
	BJ201-16130	40	14		67.5	30	115	17	26	14.5	30

类型	型 号	发生滑动时(使用单体)		质量 (g)
		承载能力(kN)	容许紧固扭矩(N·m)	
齿面	BJ201-08016	3.6	26	120
	BJ201-12022	7.4	90	330
	BJ201-16030	11.7	150	660
平面	BJ201-08116	3.6	26	120
	BJ201-12122	7.4	90	330
	BJ201-16130	11.7	150	660



使用示例及使用方法
备有 BJ500 齿条板，可选择夹紧高度并可防止夹紧时发生偏移。(参照P.328)

附 件
平垫圈···1个