



CP110

侧推夹具

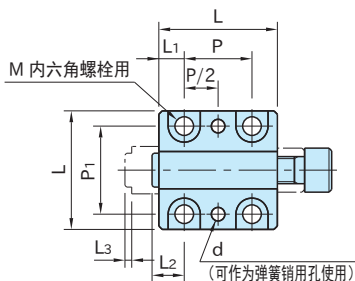


本体	轴
S45C 四氧化三铁膜	S45C 淬火回火 四氧化三铁膜

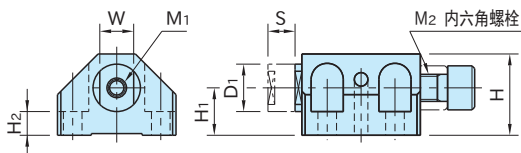

型 号	S	D ₁	M ₁	W (_{-0.1} ^{0.1})	L ₃	L ₂	H ₁	L	M	d	H ₂	L ₁	P
CP110-08024	8	14	M 5×0.8 深 8	10	2	9.5	14	35	M 5	4	7	7.5	20
CP110-10029	10	18	M 6×1 深 10	12		12	16	45	M 6		10	25	
CP110-12031	12	20	M 8×1.25 深 12	14	2.5	15	18	55	M 8	6	8	12.5	30
CP110-16037	16	25	M10×1.5 深 15	19	3	18	20	70	M10	8		15	40

型 号	P ₁	H	M ₂	夹紧力 (kN)	容许紧固扭矩 (N·m)	质量 (g)
CP110-08024	26	24	M 8×1.25	6.2	10	160
CP110-10029	35	29	M10×1.5	11	22	340
CP110-12031	40	31	M12×1.75	20	48	540
CP110-16037	50	37	M16×2	37	121	1050

使用示例及使用方法

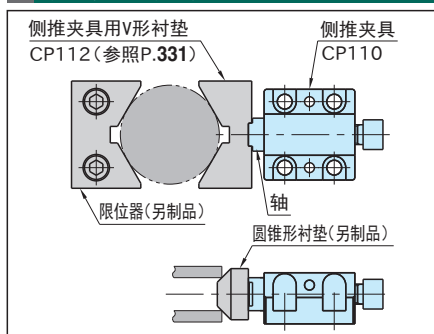

- 可安装适合工件的衬垫。
- 轴随着夹紧、松开操作前后滑动。