


PID

惰轮销

RHS SUS

IMAO

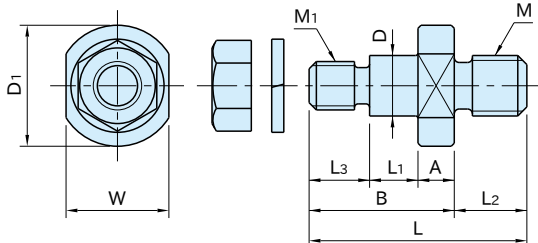

类型	本体
PID	S45C
PID-SUS	SUS303

PID (钢铁制)

型号	D	L ₁	M	L ₂	L	M ₁	L ₃	W	D ₁	A	B	质量 (g)	
PID0606	6	5.5	M 6×1	12	29.5	M 5×0.8	7	10	12	5	17.5	10	
PID0807	8	6.5	M10×1.5	12	33.5	M 6×1	9	13	16	6	21.5	25	
PID1006	10	6			36					9	24	30	
PID1012		11.5	41.5	9	29.5	34							
PID1008	10	8	M10×1.5	12	38	M 8×1.25	10	17	20	8	26	45	
PID1008L					45					15	33	55	
PID1016		15.5			49.5					12	37.5		
PID1210		12			9.5					M16×2	22.5	62	M10×1.5
PID1511-M16	15	10.5	M20×2.5	22.5	67	M12×1.75	19	22	25	15	44.5	130	
PID1511					78						55.5	160	
PID1522		21.5			86						63.5	170	
PID1529		29.5			73						15	50.5	240
PID2014	20	13.5	M20×2.5	22.5	94	M16×2	22	27	32	22	71.5	310	
PID2028		27.5									94	71.5	310
PID2050		50.5									117	94.5	370

PID-SUS (不锈钢制)

型号	D	L ₁	M	L ₂	L	M ₁	L ₃	W	D ₁	A	B	质量 (g)
PID1006-SUS	10	6	M10×1.5	12	36	M 6×1	9	13	16	9	24	30
PID1008-M16-SUS		8	M16×2		48.5	M 8×1.25						
PID1511-M16-SUS	15	10.5		M20×2.5	22.5	67	M12×1.75	19	22	25	15	44.5
PID1511-SUS			78									
PID1522-M16-SUS		21.5	M16×2	78		55.5						150

注意事项

PID1008-M16-SUS, **PID**1511-M16-SUS, **PID**1522-M16-SUS可以使用在**AST80-SUS**不锈钢制自动调节式张紧器上。

参照页

请在阅读完“驱动张紧器组合表”后使用。