


内侧、外侧轨道	保持器	球
SPCC 电镀锌 (铬酸盐光泽)	SECC	碳钢球3/16"

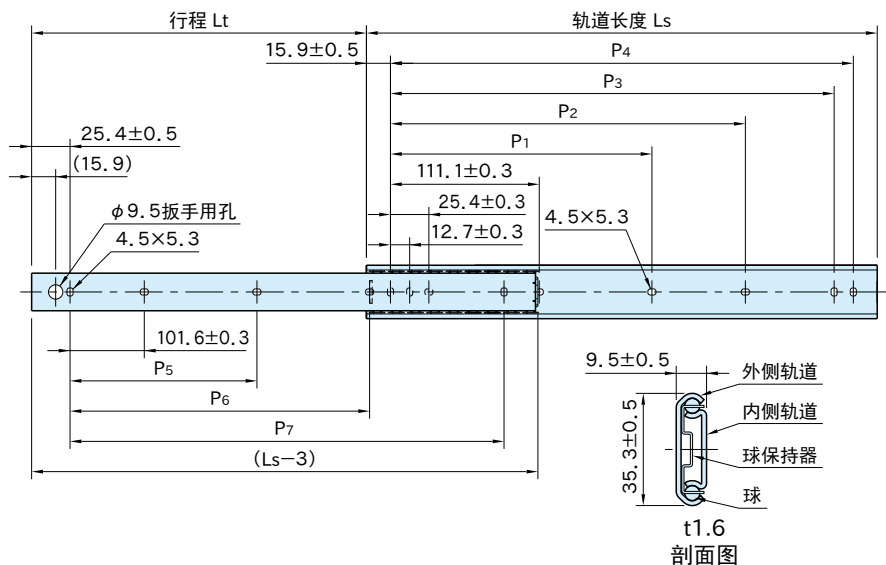

型号	Ls (±0.8)	Lt (±3)	P1 (±0.3)	P2 (±0.3)	P3 (±0.3)	P4 (±0.3)	P5 (±0.3)	P6 (±0.3)	P7 (±0.3)	额定载荷 (N/组)	质量 (g/条)
RS35S-12	304.8	228.6	—	149.2	260.3	273.0	—	152.4	254.0	490	300
RS35S-14	355.6	279.4	—	200.0	311.1	323.8	—	203.2	304.8	400	350
RS35S-16	406.4	304.8	—	250.8	361.9	374.6	—	254.0	355.6	390	400
RS35S-18	457.2	330.2	212.7	301.6	412.7	425.4	203.2	304.8	406.4	380	450
RS35S-20	508.0	381.0	238.1	352.4	463.5	476.2	228.6	355.6	457.2	330	500
RS35S-22	558.8	406.4	263.5	403.2	514.3	527.0	254.0	406.4	508.0	320	550
RS35S-24	609.6	431.8	288.9	454.0	565.1	577.8	279.4	457.2	558.8	310	600
RS35S-26	660.4	482.6	314.3	504.8	615.9	628.6	304.8	508.0	609.6	280	650
RS35S-28	711.2	508.0	339.7	555.6	666.7	679.4	330.2	558.8	660.4	270	700

### 注意事项

安装螺栓请使用M4, M3球面圆柱头小螺丝或者扁圆头小螺丝。

### 参照页

关于各种名称和功能