

TKN, TKS

滚花拇指旋钮

RHS SUS

IMAO



TKN
(内螺纹贯通孔)




TKS
(外螺纹)




TKS-R-SUS
(外螺纹、防止脱落型)


类型	本体
TKN	SS400 镀铬
TKS	S45C 镀铬
TKN-SUS	SUS303
TKS-SUS	
TKS-R-SUS	

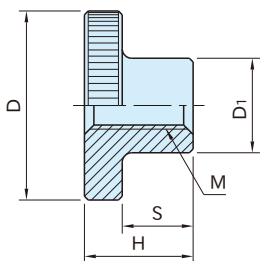

TKN TKN-SUS
(内螺纹贯通孔)

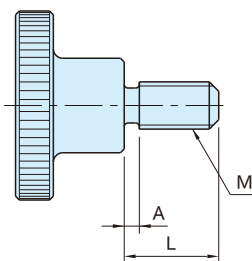

TKS TKS-SUS
(外螺纹)

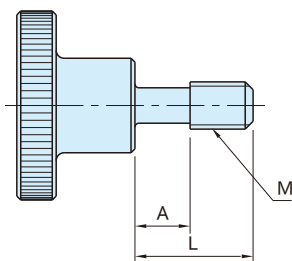

TKS-R-SUS
(外螺纹、防止脱落型)

TKN TKN-SUS (内螺纹贯通孔)

型 号	型 号	钢铁制		不锈钢制		质量 (g)	
		D	H	D ₁	S		
TKN 3	TKN 3-SUS	12	7.5	6	5	M 3×0.5	6
TKN 4	TKN 4-SUS	16	9.5	8	6	M 4×0.7	7
TKN 5	TKN 5-SUS	20	11.5	10	7.5	M 5×0.8	15
TKN 6	TKN 6-SUS	24	15	12	10	M 6×1	25
TKN 8	TKN 8-SUS	30	18	16	12	M 8×1.25	45
TKN 10	TKN10-SUS	36	23	20	15	M10×1.5	90

TKS TKS-SUS (外螺纹)


钢铁制	不锈钢制	D	H	D ₁	S	M	L	A	质量 (g)
型 号	型 号								
TKS 3×10	TKS 3×10-SUS	12	7.5	6	5	M 3×0.5	10	2	7
TKS 4×10	TKS 4×10-SUS	16	9.5	8	6	M 4×0.7	15	2.2	9
TKS 4×15	TKS 4×15-SUS								10
TKS 5×10	TKS 5×10-SUS	20	11.5	10	7.5	M 5×0.8	20	1.6	15
TKS 5×15	TKS 5×15-SUS								18
TKS 5×20	TKS 5×20-SUS								20
TKS 6×15	TKS 6×15-SUS	24	15	12	10	M 6×1	25	2	25
TKS 6×20	TKS 6×20-SUS								27
TKS 6×25	TKS 6×25-SUS								29
TKS 6×30	TKS 6×30-SUS								30
TKS 8×20	TKS 8×20-SUS	30	18	16	12	M 8×1.25	25	2.5	60
TKS 8×25	TKS 8×25-SUS								63
TKS 8×30	TKS 8×30-SUS								65
TKS 10×25	TKS 10×25-SUS	36	23	20	15	M10×1.5	30	3	115
TKS 10×30	TKS 10×30-SUS								119
TKS 10×40	TKS 10×40-SUS								125

TKS-R-SUS (外螺纹、防止脱落型、不锈钢制)

型 号	D	H	D ₁	S	M	L	A	质量 (g)
TKS3×10R 6-SUS	12	7.5	6	5	M3×0.5	10	6	3.6
TKS4×10R 5-SUS	16	9.5	8	6	M4×0.7		5	8.5
TKS4×15R10-SUS						15	10	8.8
TKS5×10R 4-SUS	20	11.5	10	7.5	M5×0.8	10	4	15.2
TKS5×20R14-SUS						20	14	16.0
TKS6×15R 7-SUS	24	15	12	10	M6×1	15	7	28.7
TKS6×20R12-SUS						20	12	29.3
TKS6×30R22-SUS						30	22	29.8
TKS8×20R10-SUS	30	18	16	12	M8×1.25	20	10	56.2
TKS8×30R20-SUS						30	20	58.4

特 点

最适合作为面板固定用。

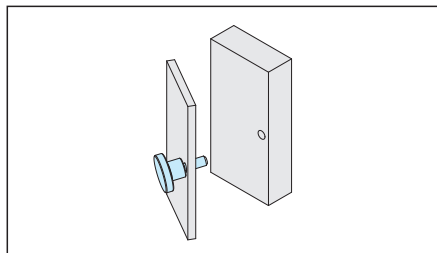

使用示例及使用方法

TKS-R-SUS 型在拆卸面板的时候，旋钮的螺丝部能挂在面板上，可有效防止丢失。

