


BJ773-SUS

T-HANDLE KWIK-LOK PINS

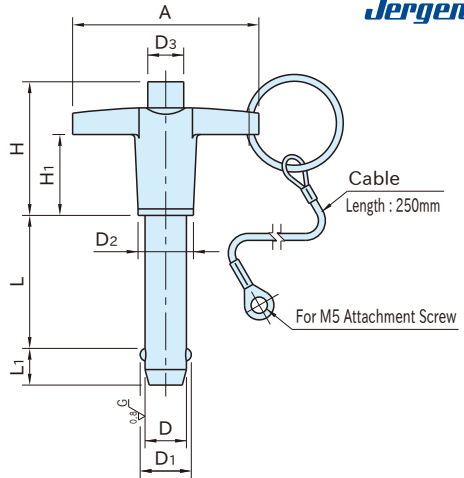


Shank	Handle	Balls
Stainless steel (SUS630) Passivated Precision ground	Cast aluminum (ADC10) Anodized Black	Stainless steel (SUS440C)

Part Number	D (-0.02)	D ₁ (± 0.3)	L ($+0.5$)	L ₁ (± 1)	A	D ₂	D ₃	H	H ₁	Weight (g)
BJ773-05010-SUS	5	5.5	10	6	46	11	6.5	32	21	30
BJ773-05015-SUS			15							31
BJ773-05020-SUS			20							32
BJ773-05025-SUS			25							33
BJ773-05030-SUS			30							34
BJ773-06015-SUS	6	7	15	7	46	11	6.5	32	21	32
BJ773-06020-SUS			20							33
BJ773-06025-SUS			25							34
BJ773-06030-SUS			30							35
BJ773-06040-SUS			40							37
BJ773-06050-SUS	50	40								
BJ773-08020-SUS	8	9.4	20	8	46	11	6.5	32	21	38
BJ773-08025-SUS			25							40
BJ773-08030-SUS			30							42
BJ773-08040-SUS			40							45
BJ773-08050-SUS			50							50
BJ773-08060-SUS			60							54
BJ773-08070-SUS			70							58
BJ773-08080-SUS			80							62
BJ773-08090-SUS			90							66
BJ773-08100-SUS			100							70

Part Number	D (-0.025 / -0.10)	D ₁ (± 0.3)	L ($+0.5$)	L ₁ (± 1)	A	D ₂	D ₃	H	H ₁	Weight (g)
BJ773-10025-SUS	10	11.9	25	9	51	14.1	7.7	36	24	55
BJ773-10030-SUS			30							58
BJ773-10040-SUS			40							65
BJ773-10050-SUS			50							70
BJ773-10060-SUS			60							76
BJ773-10070-SUS			70							82
BJ773-10080-SUS			80							88
BJ773-10090-SUS			90							94
BJ773-10100-SUS			100							100
BJ773-12030-SUS			12							14.5
BJ773-12040-SUS	40	90								
BJ773-12050-SUS	50	100								
BJ773-12060-SUS	60	108								
BJ773-12070-SUS	70	116								
BJ773-12080-SUS	80	124								
BJ773-12090-SUS	90	132								
BJ773-12100-SUS	100	140								
BJ773-16050-SUS	16	19	50	14	74	21.8	11.8	43	26	175
BJ773-16060-SUS			60							190
BJ773-16070-SUS			70							205
BJ773-16080-SUS			80							220
BJ773-16090-SUS			90							235
BJ773-16100-SUS			100							250

How To Use

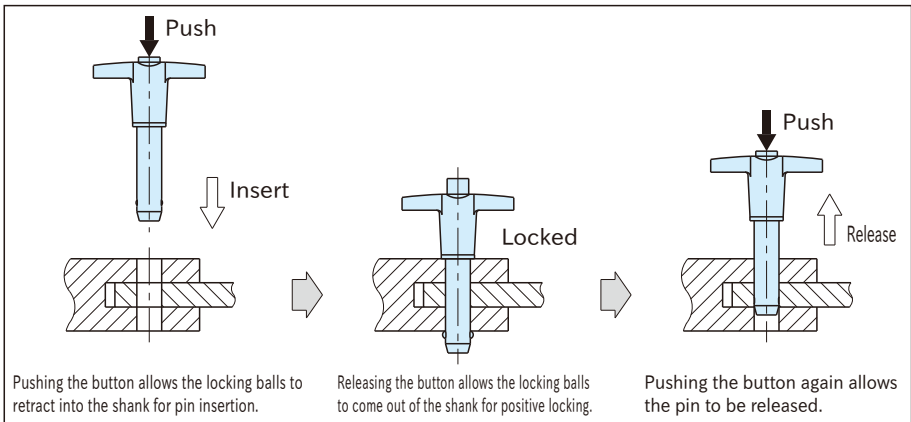

Strength Data

Pin Size	Recommended Hole Dia. ($+0.1$)	Min. Double Shear Strength (kN)
BJ773-05	5	24
BJ773-06	6	35
BJ773-08	8	65
BJ773-10	10	100
BJ773-12	12	144
BJ773-16	16	257

Feature

Precision alignment pin that allows speedily locking and unlocking workpieces in jigs or fixtures.

Notes

- Do not use as a lifting device.