


BJ775-SUS

RING-HANDLE KWIK-LOK PINS

ROHS SUS

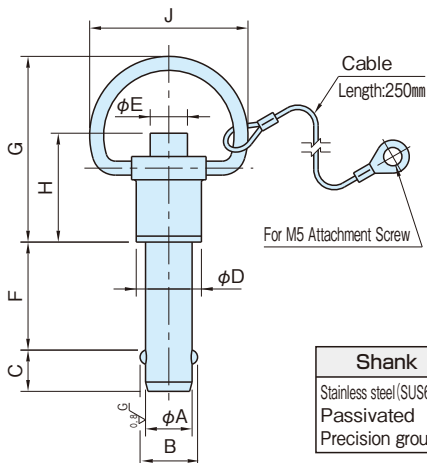


Shank	Balls
Stainless steel (SUS630) Passivated Precision ground	Stainless steel (SUS440C)

Part Number	A ($\begin{smallmatrix} -0.03 \\ -0.13 \end{smallmatrix}$)	B (± 0.3)	C (± 1)	D	E	F ($\begin{smallmatrix} +0.5 \\ 0 \end{smallmatrix}$)	G	H	J	Weight (g)
BJ775-05010-SUS	5	5.5	6	11.0	6.5	10	34	20	28	28
BJ775-05015-SUS						15				
BJ775-05020-SUS						20				29
BJ775-05025-SUS						25				
BJ775-05030-SUS						30				
BJ775-06015-SUS	6	7	7	11.0	6.5	15	34	20	28	30
BJ775-06020-SUS						20				
BJ775-06025-SUS						25				31
BJ775-06030-SUS						30				
BJ775-06040-SUS						40				
BJ775-06050-SUS	8	9.4	8	11.0	6.5	50	34	22	28	37
BJ775-08020-SUS						20				34
BJ775-08025-SUS						25				36
BJ775-08030-SUS						30				38
BJ775-08040-SUS						40				42
BJ775-08050-SUS	10	11.9	9	14.1	7.7	50	40	26	28	45
BJ775-08060-SUS						60				49
BJ775-08070-SUS						70				53
BJ775-08080-SUS						80				57
BJ775-08090-SUS						90				61
BJ775-08100-SUS	10	11.9	9	14.1	7.7	100	40	26	28	65
BJ775-10025-SUS						25				55
BJ775-10030-SUS						30				60
BJ775-10040-SUS						40				65
BJ775-10050-SUS						50				70
BJ775-10060-SUS	10	11.9	9	14.1	7.7	60	40	26	28	76
BJ775-10070-SUS						70				82
BJ775-10080-SUS						80				88
BJ775-10090-SUS						90				94
BJ775-10100-SUS						100				100

Part Number	A (-0.03 $+0.13$)	B (± 0.3)	C (± 1)	D	E	F ($+0.9$ -0)	G	H	J	Weight (g)
BJ775-12030-SUS	12	14.5	10	14.4	7.7	30	40	28	29	85
BJ775-12040-SUS						40				95
BJ775-12050-SUS						50				100
BJ775-12060-SUS						60				110
BJ775-12070-SUS						70				118
BJ775-12080-SUS						80				130
BJ775-12090-SUS						90				136
BJ775-12100-SUS						100				145
BJ775-16050-SUS	16	19	14	21.8	12.4	50	56	36	42	220
BJ775-16060-SUS						60				235
BJ775-16070-SUS						70				252
BJ775-16080-SUS						80				270
BJ775-16090-SUS						90				284
BJ775-16100-SUS						100				300

How To Use

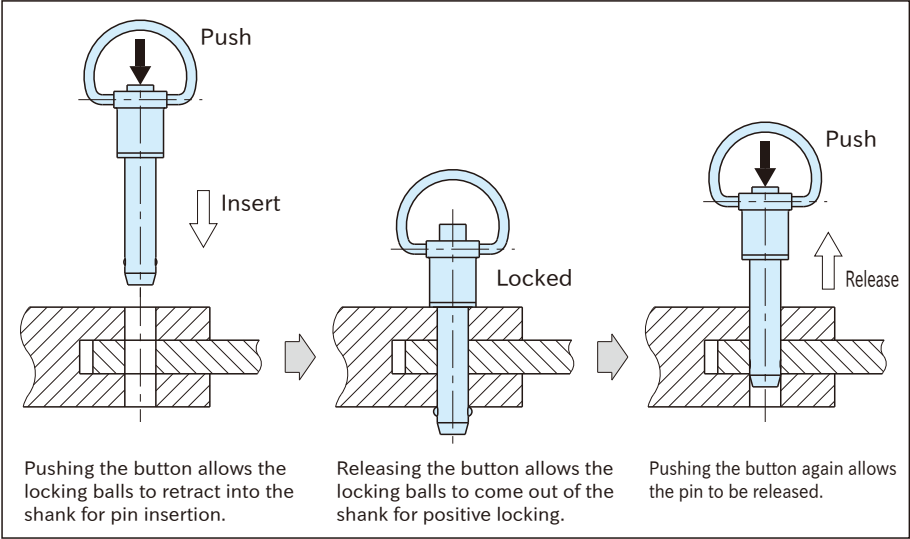

Strength Data

Pin Size	Recommended Hole Dia. ($+0.1$ -0)	Min. Double Shear Strength (N)
BJ775-05	5	24,000
BJ775-06	6	35,000
BJ775-08	8	65,000
BJ775-10	10	100,000
BJ775-12	12	144,000
BJ775-16	16	257,000

- Precision alignment pin that allows speedily locking and unlocking workpieces in jigs or fixtures.

CAUTION :
Do not use as a lifting device.