




PTSW1

SWING CLAMPS (Quick-Acting)




Without Clamp Arm

Body / Clamp-Arm Holder / Hex. Head	Clamp Arm
SCM440 steel Quenched and tempered Black oxide finish	S45C steel Quenched and tempered Black oxide finish



Feature

- The clamp arm swings in swift response to the turning speed of an impact wrench, for quick clamping.
- A short clamp-arm travel allows quick clamping.



Note: For robotized production lines, use NUTRUNNER SWING CLAMPS.

■ With Clamp Arm

Part Number	Clamping Force(kN)	Allowable Screw Torque (N·m)	Clamping Direction	Weight (kg)
PTSW1-12R	6	28	CW	1.6


■ Without Clamp Arm

Part Number	Clamping Force(kN)	Allowable Screw Torque (N·m)	Clamping Direction	Weight (kg)
PTSW1-12NR	6	28	CW	1.2

Note: The clamp arm can be replaced with a custom one of your own design. Refer to the instruction on our website for the dimensions and details. Note that the clamping force with the custom clamp arm may increase or decrease from the value above.



How To Use

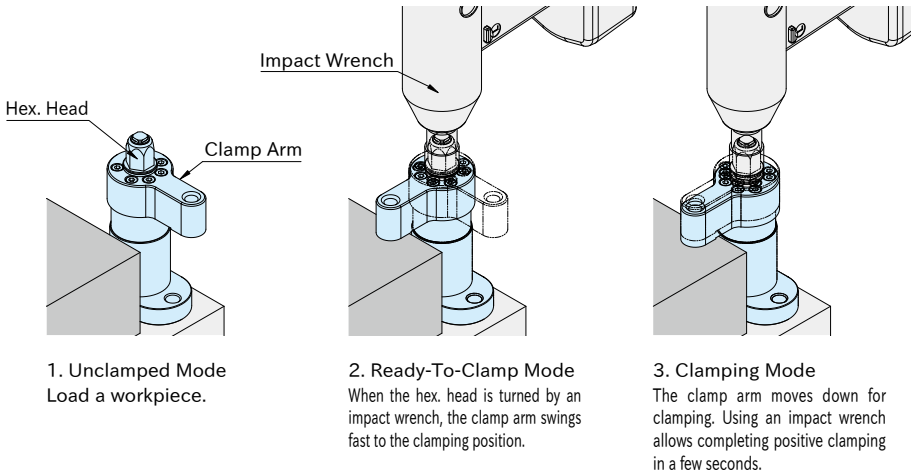

Note

- Do not use applying higher torque than allowable for a long period of time, to avoid damage. Using a torque-settable impact wrench is recommended.
- Use **PTSW2** in robotized production lines.