


TC-CEP

FIXED TIGHTENERS

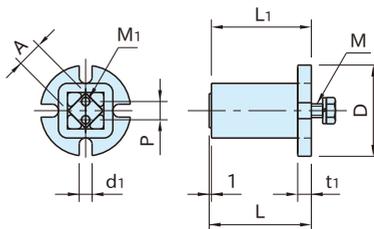

Body	Insert	Elastic Cylinders
FCD400 Hammerstone finish Gray	Aluminum (A6060)	Natural Rubber

Part Number	M ₁	P	A	L	D	t ₁	L ₁	M	d ₁ [*]	Max. Torque (N·m)	Tightening Torque (N·m)	Weight (g)
TC-CEP20	M 6×1 Depth 14	10	15	57	50	8	56	M 8×1.25	9	13.6	25	300
TC-CEP30		12	18	70	60	10	69	M10×1.5		34	49	460
TC-CEP40	M10×1.5Depth 25	20	27	97	80	15	96	M12×1.75	11	103	89	1400

^{*}) d₁ is size of material and tapered shape with casting surface.

Features:

- The structure is simple and easy to use. It absorbs impact and vibration by its high elasticity.
- It permanently eliminates problems such as noise (there are no metal parts in contact with one another) and pollution (there are no lubricants and wear is insignificant), with a notable reduction or running costs.
- It is stain-resistant and has high tolerance to water and sunlight.
- Can be installed to your applications with bolts.

Technical information:

Working temperature : -40 to 80°C

Notes:

Use small and low head cap screws to fix the arm of **TC-CEP20** , **TC-CEP30**

How To Use

