


BJ755

Tスロットボルト

標準
在庫品

IMAO

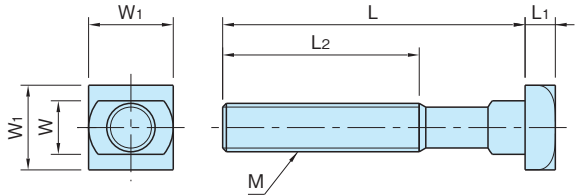

本体
スチール
四三酸化鉄皮膜

品番	T溝	W	M	L ₂	L	W ₁	L ₁	質量 (g)	価格
BJ755-14050	14用	13.7	M12×1.75	35	50	22	8	70	1,420
BJ755-14063				45	63			80	1,540
BJ755-14080				55	80			100	1,620
BJ755-14100				65	100			110	1,740
BJ755-14125				75	125			120	1,820
BJ755-14160				100	160			150	1,970
BJ755-14200				120	200			180	2,100
BJ755-18063	18用	17.7	M16×2	45	63	28	10	160	1,940
BJ755-18080				55	80			185	2,100
BJ755-18100				65	100			203	2,200
BJ755-18125				85	125			245	2,400
BJ755-18160				100	160			280	2,600
BJ755-18200				125	200			330	2,700
BJ755-18250				150	250			430	3,100
BJ755-22080	22用	21.7	M20×2.5	55	80	35	14	330	2,700
BJ755-22100				65	100			400	2,800
BJ755-22125				85	125			428	3,000
BJ755-22160				110	160			500	3,100
BJ755-22200				125	200			570	3,700
BJ755-22250				150	250			680	4,200
BJ755-22315				190	315			820	4,800

品番	T溝	W	M	L ₂	L	W ₁	L ₁	質量 (g)	価格
BJ755-24100	24用	23.7	M24×3	70	100	40	16	540	4,000
BJ755-24125				85	125			640	4,200
BJ755-24160				110	160			770	4,700
BJ755-24200				125	200			900	5,100
BJ755-24250				150	250			1040	5,800
BJ755-24315				190	315			1270	7,300
BJ755-24400				240	400			1410	8,700
BJ755-28100				28用	27.7			M24×3	70
BJ755-28125	85	125	720			4,300			
BJ755-28160	110	160	800			4,700			
BJ755-28200	125	200	950			5,300			
BJ755-28250	150	250	1120			6,100			
BJ755-28315	190	315	1350			7,500			
BJ755-28400	240	400	1490			8,800			

使用例・使用方法

