


BJ163

U形压板

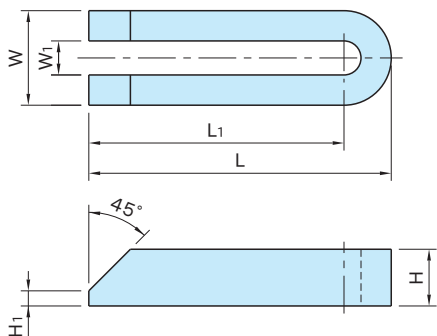

本体
S45C
涂饰

型 号	L (±6)	W	H	W ₁	L ₁	H ₁	夹紧力(kN) 突出量max.~min.	容许紧固扭矩 (N·m)	质量 (kg)
BJ163-08080	80	25	15	9	67.5	4	3.7~ 7.5	17	0.14
BJ163-10100	100	31	20	11	84.5	5	5.9~11.8	34	0.30
BJ163-12125	125	38	25	14	106	6	10.3~20.7	71	0.57
BJ163-12160	141				11.4~22.9		0.73		
BJ163-12200	181				12.2~24.4		0.91		
BJ163-16160	160	48	30	18	136	8	14.5~29	129	1.08
BJ163-16200	176		15.8~31.6		1.36				
BJ163-16250	226		16 ~32.1		2.25				
BJ163-20200	200	52	40	22	174	10	16.3~32.6	183	1.80
BJ163-20250	219	17.7~35.3			3.00				
BJ163-20315	284	18.9~37.7			3.85				
BJ163-24200	200	66	40	26	167	10	22.9~45.7	320	2.40
BJ163-24250	217				25.3~50.6		3.00		
BJ163-24315	282				27.1~54.3		3.85		

注意事项

产品颜色因生产批次不同，会有些许差异。

使用示例及使用方法

