

BJ757

QUICK FASTENING NUTS




Stainless Steel



(Steel)



(Stainless Steel)



Type	Body
BJ757	SUM43 steel Black oxide finish Heat treated to Rc32
BJ757-SUS	SUS316L stainless steel

Steel	Stainless Steel	M	D	H	D ₁	S	d	Allowable Screw Torque (N·m)	weight (g)
Part Number	Part Number								
BJ757-04001	BJ757-04001-SUS	M 4×0.7	16	12	11	8	4.2	1.3	13
BJ757-05001	BJ757-05001-SUS	M 5×0.8	20		14		5.2	1.5	25
BJ757-06001	BJ757-06001-SUS	M 6×1	24	14	16	10	6.2	1.6	38
BJ757-08001	BJ757-08001-SUS	M 8×1.25	30	17	20	12	8.2	2.9	75
BJ757-10001	BJ757-10001-SUS	M10×1.5	36	20	28	14	10.3	4.2	130
BJ757-12001	BJ757-12001-SUS	M12×1.75	40	24	32	16	12.3	5	185


Feature

Nut that allows you to complete fastening quickly.

Note:

Use a bolt longer than B dimension.

How To Use

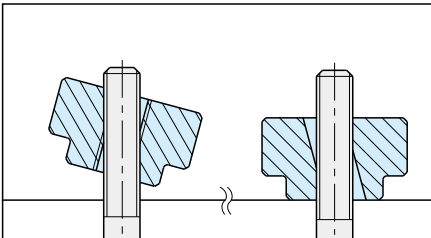

Slide the Quick Fastening Nut over the bolt to the workpiece being bolted down, and then tighten the nut in the perpendicular position.